



### MĂRIME

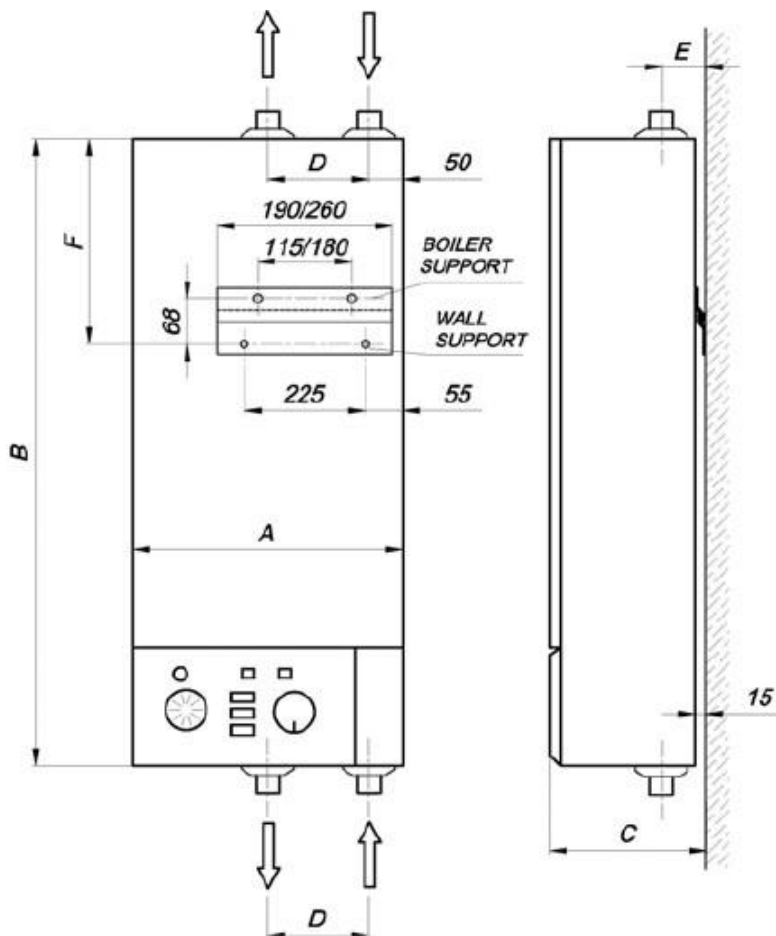


Randament kW	Volum l	Vas expansiune l/bar	Mărire						Greutate kg	Presiunea maximă MPa (bar)	Conexi un	Conexiune electrică
			A	B	C	D	E	F				
6	6	8/0,8	330	930	290	100	65	320	40	0,25 (2,5)	3/4"	230V N/ 400V 3N ~50/60 Hz
9												
12												
14												
16												
18	10	10/0,8	400	930	290	150	65	305	46		1"	400 V 3N ~50/60 Hz
20												
22												
24												
28	22	12/0,8	474	930	290	226	65	305	53			
32												
36												
40												

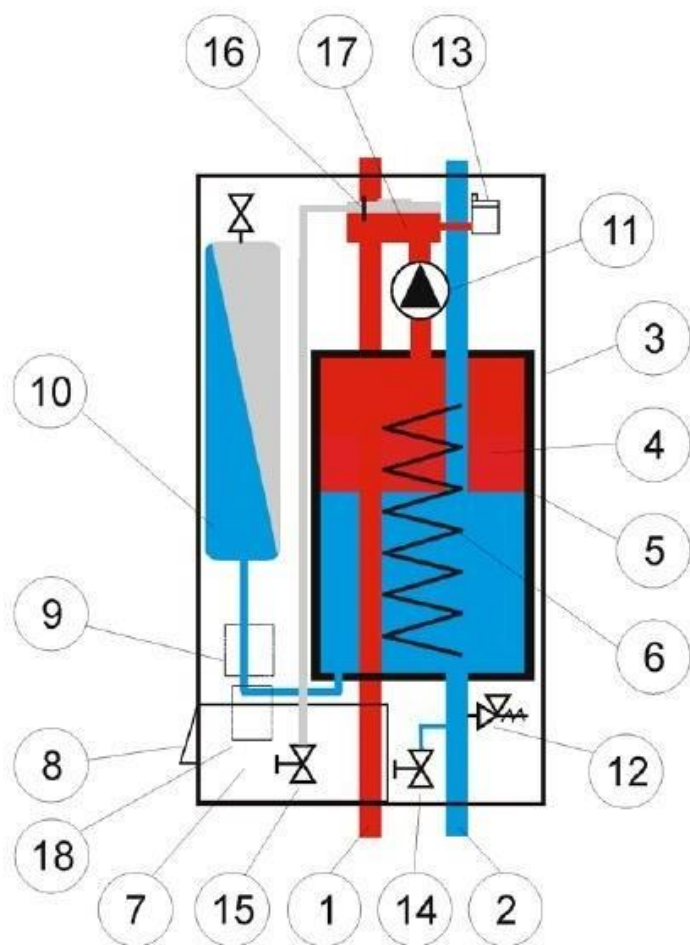


### Componente:

1. Racord tur
2. Racord Retur
3. Carcasă exterioară cazanului
4. Corp cazan
5. Izolație termică
6. Elemente încălzitoare electronice
7. Panel de control
8. Conectare electronice
9. Porniri magnetice
10. Vas de expansiune
11. Pompă de circ
12. Supapă siguranță 2,5 bar
13. Aerisitor automat
14. Robinet golire/Umplere
15. Aerisitor manual
16. Senzor de aer
17. Separator
18. Întrerupător

### Distanță de instalare

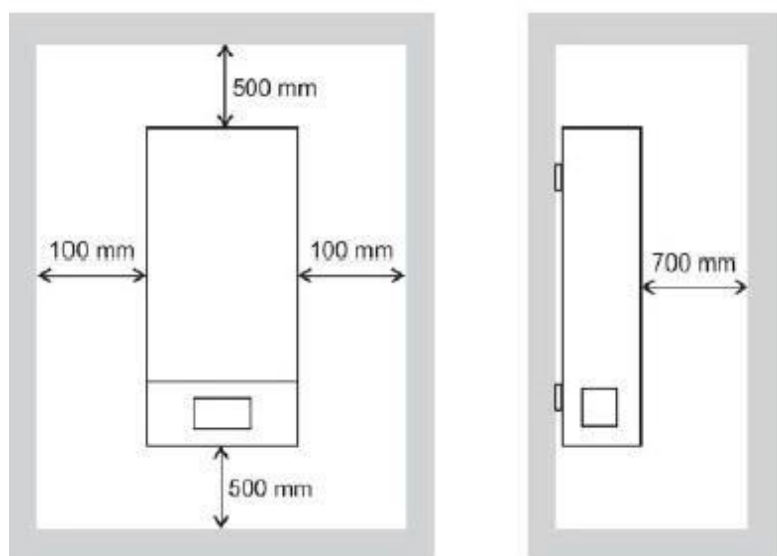

Minimal distances

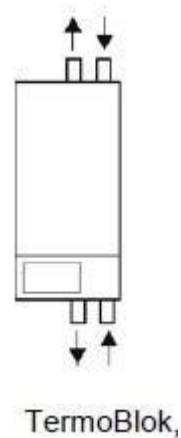

TermoBlok,

## Schema despre conexiune

