



MĂRIME

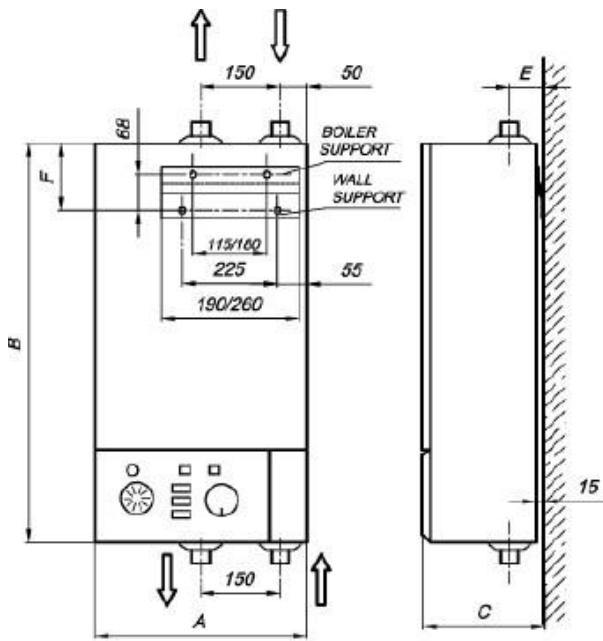


BOILERS 4,5 - 24 kW

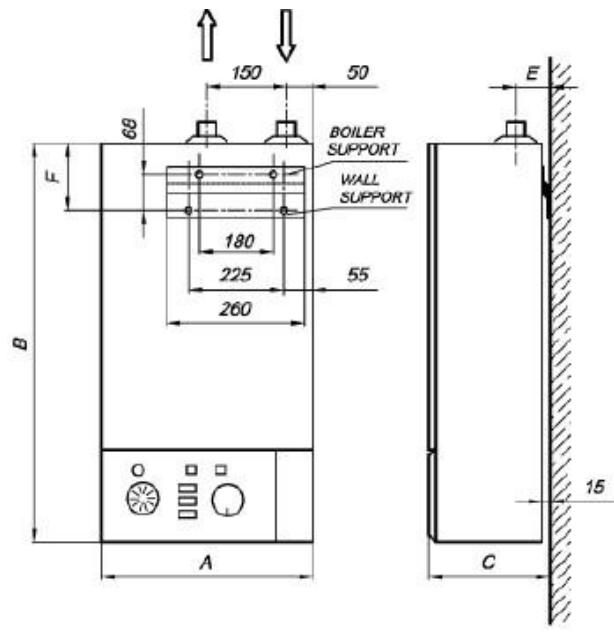

BOILERS 28 - 96 kW



Randament kW	Volum l	Mărire						Greutate kg	Presiunea maximă MPa (bar)	Conexiune	Conexiune electrică
		A	B	C	D	E	F				
6	6	330	750	230	100	57	126	26	0,25 (2,5)	3/4"	230V N/ 400V 3N ~50/60Hz
9											
12											
14											
16											
18	10	400	750	230	150	57	126	32		1"	
22											
24											
28	19	400	930	310	162	115	109	45		6/4"	400V 3N ~50/60Hz
32											
36											
40											
44											
48											
52											
56											
60											
64	32	550	930	310	316	115	175	72	2"		
72											
80											
88											
96											

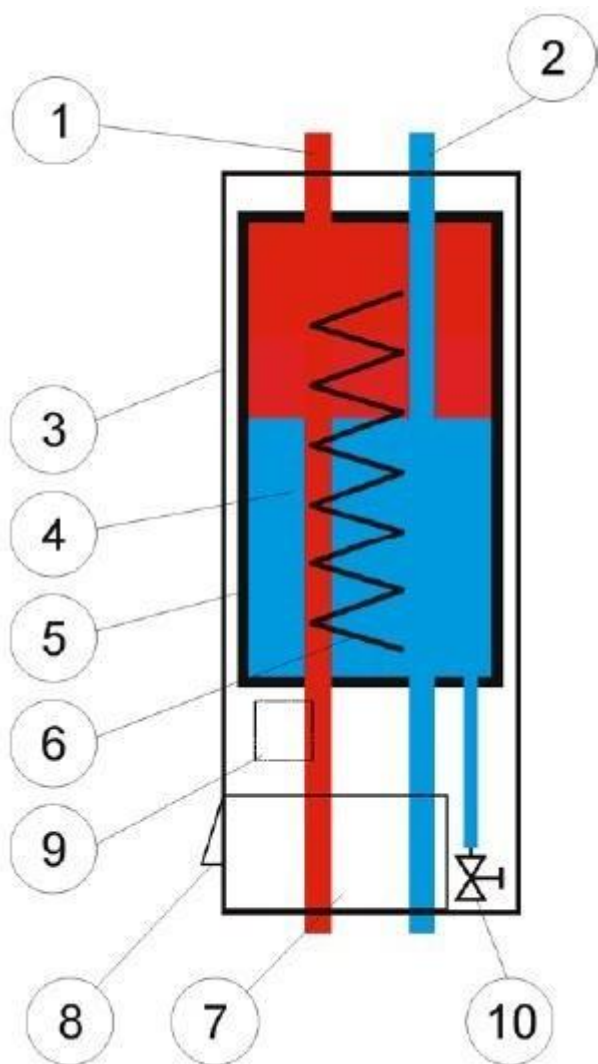

Componente:

1. Racord tur
2. Racord retur
3. Carcasă exterioră cazanului
4. Corp cazan
5. Izolație termică (19 mm)
6. Elemente încălzitoare electronice
7. Panel de control
8. Conectare electronică
9. Porniri magnetice
10. Robinet golire / umplere

DISTANȚĂ DE INSTALARE

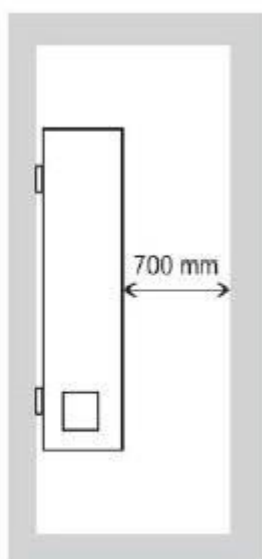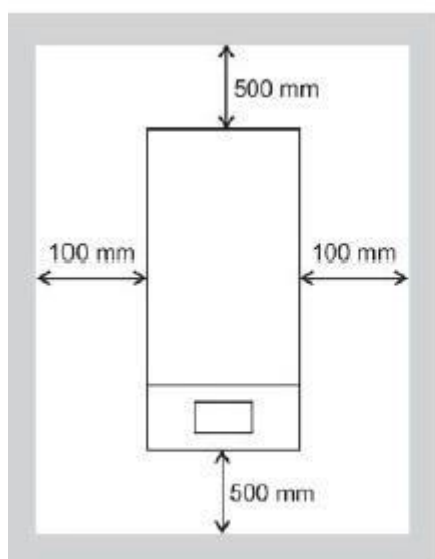

TermoExtra

Minimal distances

SCHEMA DESPRE CONEXIUNE

